



DISASSEMBLY OF HOUSING AND BASE


1. Take off water container
2. Take off screws Position 1 and coffee beans container.

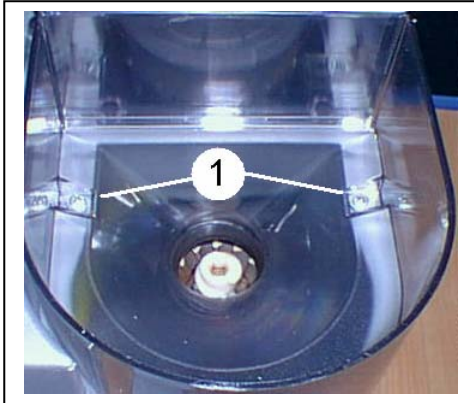


3. Point grinding degree lever in direction of the arrow cas per picture by using a screw driver.

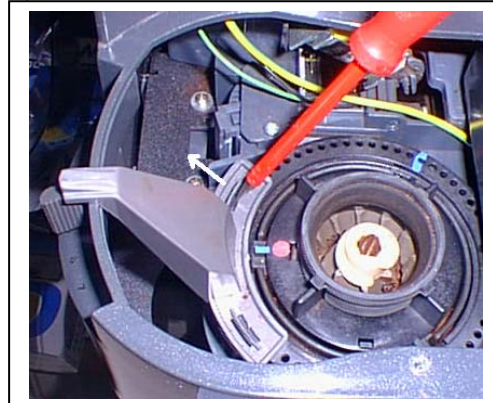


4. Take off two screws Position 1 (Torx / T10)

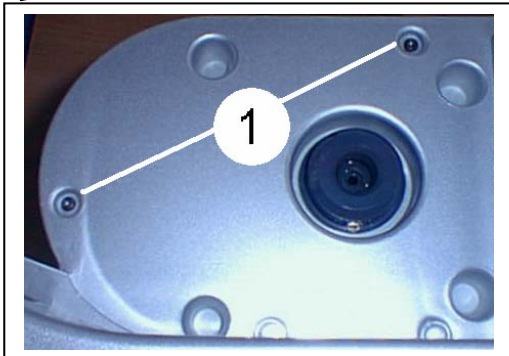


5. Take off the lower screws Position 1

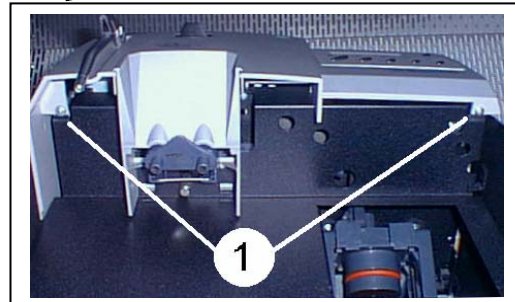

6. Take off components in position 1.

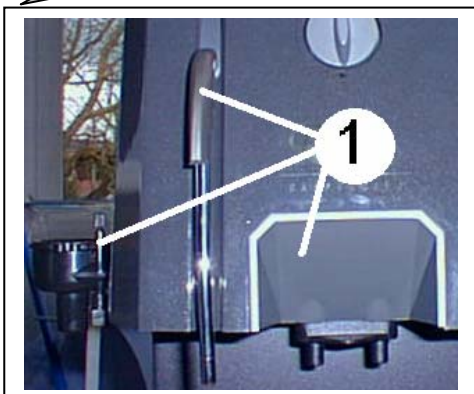


7. Take off top housing from the top. Take off water tube / pipe.

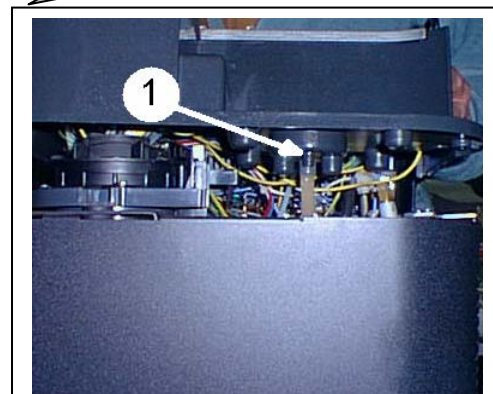


DISASSEMBLY OF PLATINS / CPU


1. Take off screws as per position 1

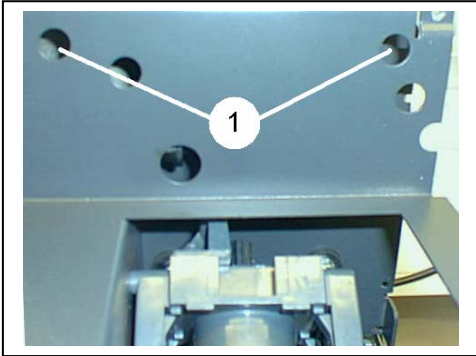

2. Re-name (with numbers) connections to CPU Board and dis-connect them.

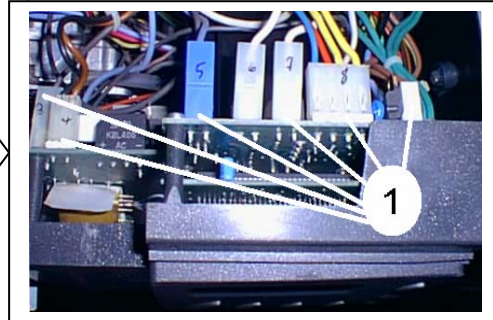

3. Take off the complete control panel assembly.

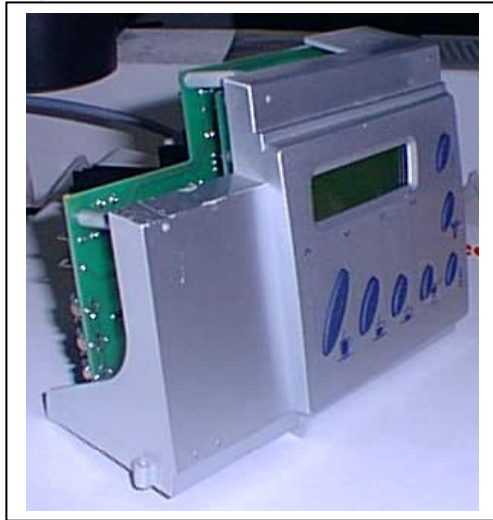

4. Take off all screws as per pos.1 and take away all correspondent platins.

